



INTELLIGENT EN WATERDICHT
INTELLIGENT AND WATERPROOF

LED PRO-STOCK SERIE

LED PRO-STOCK SERIES

De LED Pro-Stock serie bestaat uit lineaire High-Bay armaturen met vermogens oplopend van 30W tot 180W. Toepassing van medium power Nichia LED's en een Meanwell driver resulteert in een systeem efficiency tot 135 Lm/W. De verschillende montagemogelijkheden en de diversiteit aan lenzen maakt de Pro-Stock serie geschikt voor uiteenlopende toepassingen. Zoals verlichting tussen hoge magazijnstellingen tot de verlichting van grote open ruimtes.

The LED Pro-Stock series consists of linear High-Bay luminaires with power ranging from 30W to 180W. Application of medium power Nichia LEDs and a Mean Well driver results in a system efficiency up to 135 Lm/W. The different mounting options and a diversity of lenses makes the Pro-Stock series suitable for diverse applications such as lighting between high storage racks up to large open spaces.

SPECIFIEKE KENMERKEN

- 135LM/W
- Zigbee (optioneel)
- Daglichtsensor (in combinatie met Zigbee uitvoering)

SPECIFIC FEATURES

- 135LM/W
- Zigbee (optional)
- Daylight sensor (in combination with Zigbee version)

LED Pro-Stock 280 mm

30W

40644xxx



338

**vanaf
from
€ 175****LED Pro-Stock 488 mm**

60W

40644xxx



338

**vanaf
from
€ 225****LED Pro-Stock 718 mm**

90W

40644xxx



338

**vanaf
from
€ 310****LED Pro-Stock 948 mm**

120W

40644xxx



338

**vanaf
from
€ 365****LED Pro-Stock 1178 mm**

150W

40644xxx



338

**vanaf
from
€ 420****LED Pro-Stock 718 mm**

180W

40644xxx



338

**vanaf
from
€ 499**




TOEPASSINGSGEBIEDEN:
MAGAZIJNEN, PRODUCTIE- EN
LOGISTIEKE HALLEN, OVERDEKTE
STADIUMS.

APPLICATIONS:
WAREHOUSES, PRODUCTION
AND LOGISTICS HALLS, INDOOR
STADIUMS.


INTELLIGENTE LED INDUSTRIEHALVERLICHTING, EEN OVERSTAP DIE DE MOEITE WAARD IS

INTELLIGENT LED LIGHTING FOR INDUSTRIAL AREAS,
A CHANGE THAT IS WORTH THE EFFORT

Pro-Stock 30W-150W

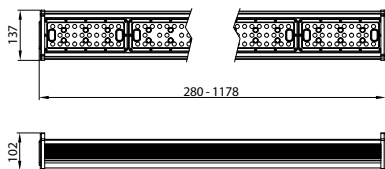

Pro-Stock 180W

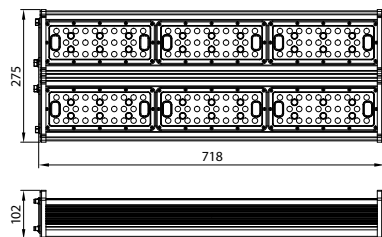

PRO-STOCK

CE IP65 

PRESTATIE (PERFORMANCE)

Vermogen Power consumption	30W	60W	90W	120W	150W	180W
Aantal LED's Number of LEDs	28 LED's (LEDs)	56 LED's (LEDs)	84 LED's (LEDs)	112 LED's (LEDs)	140 LED's (LEDs)	168 LED's (LEDs)
Afmetingen (LxHxH) Measurements (LxWxH)	280x137x102	488x137x102	718x137x102	948x137x102	1178x137x102	718x275x102
Lichstroom (3000K) Luminous flux	3.600LM	7.200LM	11.200LM	14.950LM	18.700LM	22.450LM
Lichstroom (4000K) Luminous flux	3.750LM	7.500LM	11.700LM	15.600LM	19.550LM	23.450LM
Lichstroom (5000K) Luminous flux	3.900LM	7.800LM	12.150LM	16.200LM	20.250LM	24.300LM

KENMERKEN (FEATURES)

- 135LM/W
- Zigbee (optioneel)
- Daglichtsensor (in combinatie met Zigbee uitvoering)

- 135LM/W
- Zigbee (optional)
- Daylight sensor (in combination with Zigbee version)



vanaf € 175
from

PRO-STOCK

- Lineair IP65 "High-Bay" armatuur (IP20 voor Zigbee versie)
- Uitermate geschikt voor verlichting van de gangpaden tussen hoge stellingen en grote open ruimtes
- Behuizing uit geëxtrudeerd aluminium en voorzien van een poedercoating
- Gependelde montage met behulp van staakabels of direct tegen het dak met behulp van twee bevestigingsbeugels
- Zes verschillende uitvoeringen in vermogen oplopend van 30 tot 180W
- Drie verschillende lenzen beschikbaar (30°x70°, 60°x90° en 120°)
- Leverbaar in dimbare uitvoering (0-10V of DALI)
- Leverbaar in Zigbee uitvoering (behalve 30W)


- Lineair IP65 "High-Bay" armature (IP20 for Zigbee version)
- Perfectly suited for illuminating the aisles between high racks and large open spaces
- Housing made of powder coated extruded aluminum
- Pendant mounting available by use of steel cables or directly against the ceiling through two mounting brackets
- Six different versions ranging from 30W to 180W
- Three different lenses available (30°x70°, 60°x90° and 120°)
- Available in dimmable version (0-10V or DALI)
- Available in Zigbee version (except for 30W)

CE IP65

5 JAAR GARANTIE
YEARS WARRANTY

Art.nr. Art.no.	Uitvoering Version	Opgenomen vermogen Power consumption	Kleurtemperatuur & lens Color temperature & lens
40644/ .. / .. / ..	X	X	X
	0: Standaard (Standard)	0: 30W	0: 3000K, 30° x 70° lens
	1: 1-10V dimbaar (1-10V dimmable)	1: 60W	1: 4000K, 30° x 70° lens
	2: DALI dimbaar (DALI dimmable) (beschikbaar voor (available for) 90W, 120W, 150W, 180W)	2: 90W	2: 5000K, 30° x 70° lens
	3: Zigbee (beschikbaar voor (available for) 60W, 90W, 120W, 150W, 180W)	4: 120W	3: 3000K, 60° x 90° lens
		5: 150W	4: 4000K, 60° x 90° lens
		6: 180W	5: 5000K, 60° x 90° lens
			6: 3000K, 120° lens
			7: 4000K, 120° lens
			8: 5000K, 120° lens

¹ kan verschillen per vermogen (W) / may vary per power consumption (W)



40644090: Montagebeugels 30W-150W,
€ 40,00
Mounting brackets 30W-150W



40644091: Montagebeugels 180W,
€ 40,00
Mounting brackets 180W



40644590: Wi-Fi Zigbee gateway, € 230,00
Wi-Fi Zigbee gateway




40644592: Daglichtsensor, € 185,00
Daylight sensor



40644092: Montagehaken 30W-150W,
€ 14,00
Mounting hooks 30W-150W



40644093: Pendelset, € 12,00
Pendant set



40644591: Afstandsbediening, € 125,00
Remote control



Mobiele Zigbee App
Mobile Zigbee App

SPECIFICATIES (FEATURES)

Lichtbron (Light Source): Nichia LED's (LEDs)

Kleurweergave index (Color rendering index): Ra > 70

Bedrijfstemperatuur (Operating temperature): -30°C ~ +50°C

Aantal branduren (Rated life hours): > 60.000 uur (hours)

LED voeding (inclusief) (LED driver (included)): Meanwell IP65

Voedingsspanning (Input): 100-277V AC 47/63Hz

Cosinus phi (Power factor): > 0.93

Zigbee uitvoeringen:

- Draadloze RF communicatie
- Armaturen zijn in te delen in groepen welke individueel geschakeld en gedimd kunnen worden
- Samenstelling van de groepen is eenvoudig te wijzigen zonder wijzigingen in de bekabeling
- Automatische sturing op basis van daglicht mogelijk door middel van de als accessoire leverbare daglichtsensor
- Eenvoudige bediening met Smartphone of tablet of door middel van de als accessoire leverbare Zigbee afstandsbediening

Zigbee versions:

- Wireless RF communication
- Luminaires can be divided into groups which can be individually switched and dimmed
- Changing groups is easy and can be done without changes in wiring
- Illumination level can be managed automatically by a separately available daylight sensor
- Easy to operate with smartphone or tablet or by using a separately available matching Zigbee remote control

